




OmniView® IP KVM/IP Switch 5108K/5116K

ROBUST, REMOTE ACCESS – SINGLE USER KVM-over-IP SWITCH

Designed to manage today's challenging, distributed IT landscape, OmniView^{IP} KVM solutions provide IT professionals with real time, BIOS-level access to local and remote data center locations. Offering robust KVM-over-IP technology, OmniView^{IP} KVM switches enable remote, light-out management capabilities not found in traditional software management tools. Supported by Belkin's OmniView^{IP} HQ Centralized Access Platform, these solutions are scalable to meet the needs of the most demanding, dynamic IT environments.

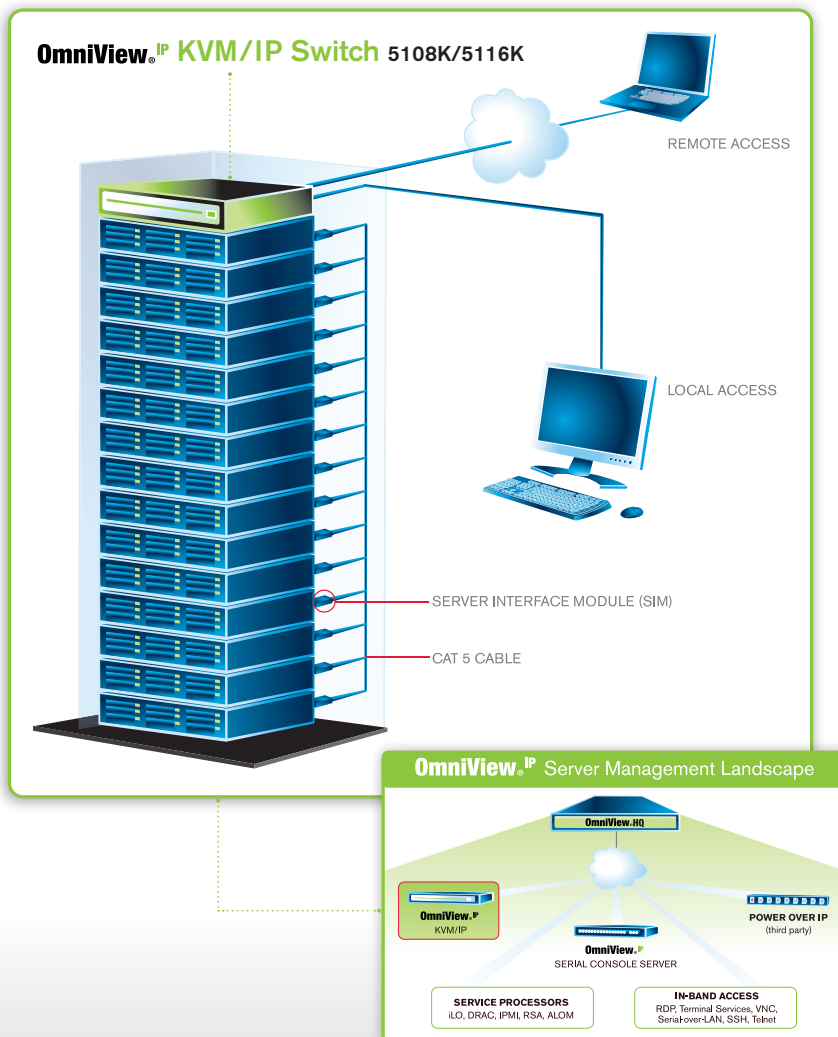

► 5108K/5116K Features:

Advanced Performance

Highly responsive video and mouse performance

Seamless Control

Instantaneous switching between attached servers

Rapid Synchronization

Provides always-on video capabilities during boot-up process

Multi-Browser Support

Supports Internet Explorer and Mozilla Firefox browsers for heterogeneous environments

BIOS-Level Access

Enables remote troubleshooting during critical BIOS process

Remote Serial Access

Provides integrated support for up to two, external serial

Centralized Management

Integrates seamlessly with OmniView^{IP} HQ Centralized Access Appliance; manage multiple KVM-over-IP switches, Serial Console Servers, IP-based Power, and other assets through a single access portal

Superior Video Performance

1600x1200 resolution capability

Daisy-Chain Expansion

Dedicated daisy-chain port provides integrated expansion for growing environments

2-year warranty

Belkin's assurance | **Quality. Service. Value.**

Package Contents

- KVM-over-IP Switch
- AC Power Cable
- Serial to RJ45 Interface (flash) Cable
- User Manual CD
- Quick-Start Guide
- Rack Mount Brackets and Screws



PART NUMBER DESCRIPTION

F1DP108G	OmniView ^{IP} 1-User, 8-Port KVM-over-IP Switch
F1DP116G	OmniView ^{IP} 1-User, 16-Port KVM-over-IP Switch

SERVER INTERFACE MODULES (SIMS)

F1DP101A-AP	VGA, PS/2
F1DP101A-AU	VGA, USB (SUN USB Support)
F1DP101A-AP-8PK	VGA, PS/2 8-Pack
F1DP101A-AU-8PK	VGA, USB 8-Pack

RELATED PRODUCTS OmniView^{IP} Server Management Landscape

- OmniView^{IP} HQ Centralized Management Appliance - 5000HQ
- OmniView^{IP} Dual User KVM-over-IP Switch - 5216K/5232K
- OmniView^{IP} Serial Console Server - 5116S
- Intelligent Power Management (third party)

Product Specifications

	OmniView ^{IP} 5108K	OmniView ^{IP} 5116K
Part Number	F1DP108G	F1DP116G
Number of Ports	8	16
Number of Users Supported	1 digital, 1 local	1 digital, 1 local
Maximum Resolution	1600x1200 @ 85Hz	1600x1200 @ 85Hz
Local Console	PS2, VGA	PS2, VGA
Network Interface	RJ-45 – 10/100Mbit/sec auto-sensing	RJ-45 – 10/100Mbit/sec auto-sensing
Expansion	Dedicated daisy-chain port	Dedicated daisy-chain port
Browser Support	IE 6.0+	IE 6.0+
Security	128-bit SSL	128-bit SSL
Serial Connections	(2) RJ45 serial connections for pass-through, CLI access	(2) RJ45 serial connections for pass-through, CLI access
Server Connections	Cat5-based connectivity; Server Interface Module (SIM) for PS/2 and USB systems	Cat5-based connectivity; Server Interface Module (SIM) for PS/2 and USB systems
Centralized Management	OmniView ^{IP} HQ compatible	OmniView ^{IP} HQ compatible
Dimensions	17" W x 1.75" H x 10.6" D (431 x 44 x 270mm)	17" W x 1.75" H x 10.6" D (431 x 44 x 270mm)
Weight	5.5 lbs	5.5 lbs
Power/Environment		
Power Supply	100 – 240 VAC 50 / 60 Hz	100 – 240 VAC 50 / 60 Hz
Operating Temperature	32° to 104° F (0° to 40° C)	32° to 104° F (0° to 40° C)
Storage Temperature	-4° to 140° F (-20° to 60° C)	-4° to 140° F (-20° to 60° C)
Humidity	0-80% RH, non-condensing	0-80% RH, non-condensing
Warranty	2 years	2 years

Note: Specifications are subject to change without notice.

BELKIN[®]
www.belkin.com/kvm

Belkin International, Inc.
Los Angeles, CA 90220, USA
310 898 1100

Belkin Ltd.
Rushden, United Kingdom
+44 (0) 1933 35 2000

Belkin Ltd.
Tuggerah, Australia
+61 (0) 2 4350 4600