

BELKIN®



OmniView® Secure KVM Switch with DVI-D Dual-Link Support

DISCRETE, SEPARATE CHANNELS FOR MANAGING UP TO 4 SYSTEMS

Designed specifically for secure military and government installations, the OmniView Secure KVM Switch lets you control multiple USB computers from a single console. This product ensures the integrity of your data by safely switching among computers running at different security levels. The OmniView Secure KVM Switch is NIAP Common Criteria validated to EAL 4+, augmented with ALC_FLR.3, and conforms to the latest Protection Profile v1.2 (August 2008) for peripheral sharing devices.




BACK VIEW

Isolated, discrete channels
for each attached system

► Features:

- **Dedicated processor per system port**
maintains separation between secure/unsecured systems; protects data and prevents data transfer among computers
- **No memory buffer**
eliminates unintentional transfer of keystrokes or other data when switching between systems
- **Non-reprogrammable firmware**
prevents malicious tampering with KVM logic
- **Circuits soldered directly to circuit board**
prevents tampering with circuit board level components
- **Tamper-evident tape on enclosure**
visual security indicator; assures security when intact
- **Metal enclosure**
designed for demanding environments
- **DVI-D Dual-Link support**
maximum resolution of 2560x1600
- **ALC_FLR.3 certified**
control standards for quality and security assurance
- **Protection Profile v1.2 conformance**
meets the latest security standards released in August 2008 for peripheral sharing devices

SECURE AND
UNSECURED SYSTEMS

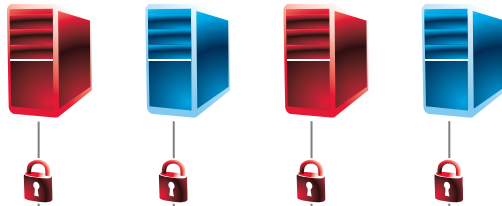

USER CONSOLE



SECURE KVM SWITCH

The Secure KVM Switch uses a dedicated processor for each port, eliminating the possibility of data transfer between connected systems.

This product is certified by the National Information Assurance Partnership (NIAP). It is validated in accordance with the provisions of the NIAP Common Criteria Evaluation and Validation Scheme to EAL 4+ (Evaluated Assurance Level 4 augmented with ALC_FLR.3). The OmniView Secure KVM Switch is made in the USA and is TAA-compliant.



Package Contents

- OmniView Secure DVI-D Dual-Link KVM Switch
- 5V DC, 3A Global Power Adapter with 4 Interchangeable Plugs
- User Manual
- Quick Installation Guide

PART NUMBER	DESCRIPTION
F1DN102D	OmniView Secure DVI-D Dual-Link 2-Port KVM Switch
F1DN104D	OmniView Secure DVI-D Dual-Link 4-Port KVM Switch

CABLES (not included with Switch)**

F1D9201-06	Belkin DVI/USB Secure KVM Cables, 6 ft.
F1D9201-10	Belkin DVI/USB Secure KVM Cables, 10 ft.
F1D9201-15	Belkin DVI/USB Secure KVM Cables, 15 ft.

***One cable kit per connected computer required*

Product Specifications

Part Number	F1DN102D	F1DN104D
No. of Users Supported	1	1
No. of Computers Supported	2	4
Dimensions	11 (W) x 1.75 (H) x 6 (L) in.	11 (W) x 1.75 (H) x 6 (L) in.
Weight	2.5 lbs. (1.1kg.)	2.5 lbs. (1.1kg.)
Enclosure	Metal with plastic faceplate	Metal with plastic faceplate
Keyboard/Mouse Ports	USB	USB
Video Output	Digital (DVI-D Dual Link)	Digital (DVI-D Dual Link)
Max Resolution	2560x1600	2560x1600
Direct-Port Selectors	2	4
LED Indicators	2	4
Power/Environment		
Power Requirements	5V DC, 3A	5V DC, 3A
Operating Temperature	32° to 104° F (0° to 40° C)	32° to 104° F (0° to 40° C)
Storage Temperature	-4° to 140° F (-20° to 60° C)	-4° to 140° F (-20° to 60° C)
Warranty	3 years	3 years

BELKIN®
www.belkin.com/kvm

Belkin International, Inc.
Los Angeles, CA 90220, USA
310.898.1100

Belkin Ltd.
Rushden, United Kingdom
+44 (0) 1933 35 2000

Belkin Ltd.
Tuggerah, Australia
+61 (0) 2 4350 4600