


1 2 3 4 5 6

A

A

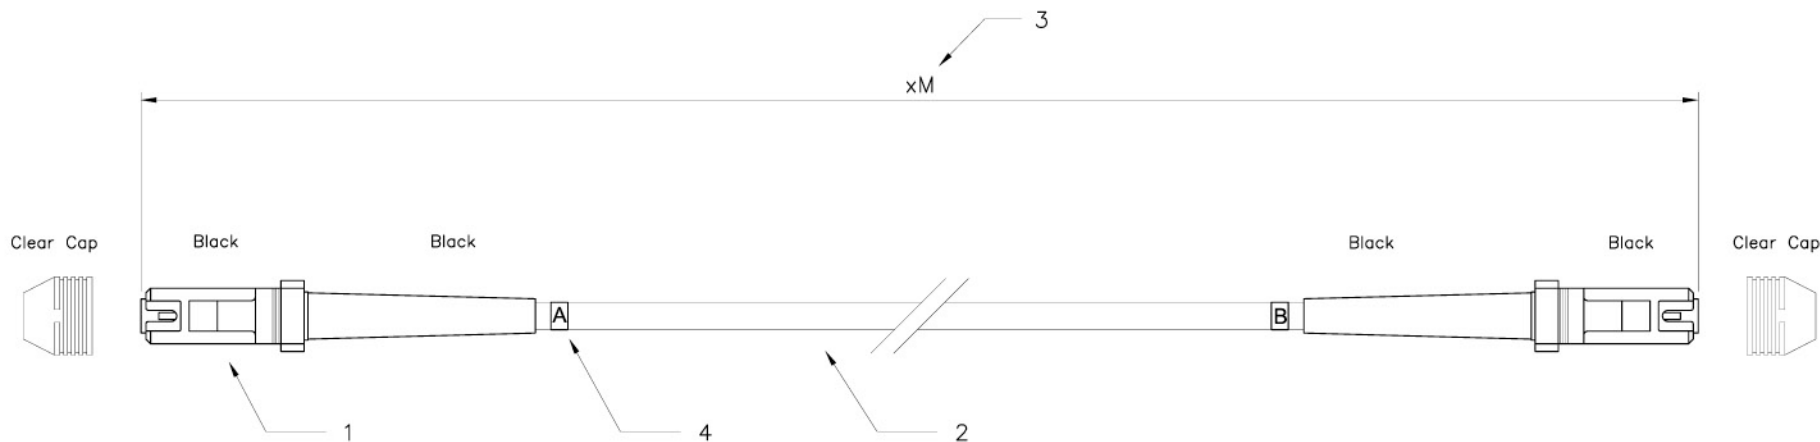

Specification:

1. Connector Type : MT/RJ Multimode
2. Cable Type :
Duallan cable, $\phi 3.0\text{mm}$, 62.5/125um Multimode,
Calbe Jacket : Orange color, PVC material
3. Length : xM
4. Cable Marker

Performance:

- a. Insertion Loss : $< 0.5 \text{ dB}$
- b. Fiber Extension : $-0.05\mu\text{m} < H < +0.05\mu\text{m}$
- c. Ferrule End-face Radius : $10 < R < 30\text{mm}$
- d. Apex Offset : $< 50\mu\text{m}$
- e. Increase in insertion loss after 500 mating : 0.2 dB Max.
- f. Operation Temperature : -20°C to $+70^{\circ}\text{C}$
- g. Storage Temperature : -40°C to $+80^{\circ}\text{C}$
- h. Humidity (non-condensing) 95%RH

BELKIN®

BELKIN CORPORATION
 501 West Walnut Street, Compton, CA 90220-5221, USA
 TEL: 310-898-1100; FAX: 310-898-1111
 www.belkin.com

PART NO.: F2F20299

DES.: MT/RJ Duallan patch cord

1 2 0 3 4 10cm 5 6

D

D

C

C

B

B