

# RADIO TEST REPORT

**REPORT NO.:** RE920221R04A

**MODEL NO.:** F5D7000

**RECEIVED:** Feb. 21, 2003

**TESTED:** Feb. 20~ Feb. 24, 2003

**APPLICANT:** Belkin Corporation

**ADDRESS:** 501 WEST WALNUT STREET COMPTON,  
CA 90220

**ISSUED BY:** Advance Data Technology Corporation

**LAB LOCATION:** No. 47 14th Ling, Chia Pau Tsuen, Linkou  
Hsiang, Taipei, Taiwan, R.O.C.

This test report consists of 54 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by NVLAP or any U.S. government agencies. The test results in the report only apply to the tested sample.



0528  
ILAC MRA

## TABLE OF CONTENTS

1.	CERTIFICATION .....	4
2.	GENERAL INFORMATION .....	5
2.1	GENERAL DESCRIPTION OF EUT .....	5
2.2	DESCRIPTION OF TEST MODES .....	6
2.3	GENERAL DESCRIPTION OF APPLIED STANDARDS .....	6
2.4	DESCRIPTION OF SUPPORT UNITS .....	7
2.5	CONFIGURATION OF SYSTEM UNDER TEST .....	7
2.6	LIST OF MEASUREMENTS .....	8
3.	TEST PROCEDURES AND RESULTS .....	9
	<b>TRANSMITTER PARAMETERS</b> .....	9
3.1	EFFECTIVE RADIATED POWER (RADIATED) .....	9
3.1.1	LIMITS OF EFFECTIVE RADIATED POWER .....	9
3.1.2	TEST PROCEDURES .....	9
3.1.3	DEVIATION FROM TEST STANDARD .....	9
3.1.4	TEST SETUP .....	9
3.1.5	TEST RESULTS (A) .....	10
3.1.6	TEST RESULTS (B) .....	11
3.2	EFFECTIVE RADIATED POWER (CONDUCTED) .....	12
3.2.1	LIMITS OF EFFECTIVE RADIATED POWER .....	12
3.2.2	TEST PROCEDURES .....	12
3.2.3	DEVIATION FROM TEST STANDARD .....	12
3.2.4	TEST SETUP .....	12
3.2.5	TEST RESULTS (A) .....	13
3.2.6	TEST RESULTS (B) .....	14
3.3	PEAK POWER DENSITY (DSSS EQUIPMENT) (RADIATED) .....	15
3.3.1	LIMIT OF PEAK POWER DENSITY .....	15
3.3.2	TEST PROCEDURES .....	15
3.3.3	DEVIATION FROM TEST STANDARD .....	15
3.3.4	TEST SETUP .....	15
3.3.5	TEST RESULTS (A) .....	16
3.3.6	TEST RESULTS (B) .....	17
3.4	PEAK POWER DENSITY (DSSS EQUIPMENT) (CONDUCTED) .....	18
3.4.1	LIMIT OF PEAK POWER DENSITY .....	18
3.4.2	TEST PROCEDURES .....	18
3.4.3	DEVIATION FROM TEST STANDARD .....	18
3.4.4	TEST SETUP .....	18
3.4.5	TEST RESULTS (A) .....	19
3.4.6	TEST RESULTS (B) .....	20
3.5	FREQUENCY RANGE (DSSS EQUIPMENT) (RADIATED) .....	21
3.5.1	LIMIT OF FREQUENCY RANGE .....	21
3.5.2	TEST PROCEDURES .....	21
3.5.3	DEVIATION FROM TEST STANDARD .....	21
3.5.4	TEST SETUP .....	21
3.5.5	TEST RESULTS (A) .....	22
3.5.6	TEST RESULTS (B) .....	24
3.6	FREQUENCY RANGE (DSSS EQUIPMENT) (CONDUCTED) .....	26
3.6.1	LIMIT OF FREQUENCY RANGE .....	26

3.6.2	TEST PROCEDURES.....	26
3.6.3	DEVIATION FROM TEST STANDARD.....	26
3.6.4	TEST SETUP.....	26
3.6.5	TEST RESULTS (A).....	27
3.6.6	TEST RESULTS (B).....	29
3.7	TRANSMITTER SPURIOUS EMISSIONS (RADIATED).....	31
3.7.1	LIMITS OF TRANSMITTER SPURIOUS EMISSIONS.....	31
3.7.2	TEST PROCEDURES.....	31
3.7.3	DEVIATION FROM TEST STANDARD.....	31
3.7.4	TEST SETUP.....	31
3.7.5	TEST RESULTS.....	32
3.7.6	TEST RESULTS (A).....	33
3.7.7	TEST RESULTS (B).....	37
3.8	TRANSMITTER SPURIOUS EMISSIONS (CONDUCTED).....	41
3.8.1	LIMITS OF TRANSMITTER SPURIOUS EMISSIONS.....	41
3.8.2	TEST PROCEDURES.....	41
3.8.3	DEVIATION FROM TEST STANDARD.....	41
3.8.4	TEST SETUP.....	41
3.8.5	TEST RESULTS (A).....	42
3.8.6	TEST RESULTS (B).....	44
	<b>RECEIVER PARAMETERS.....</b>	<b>46</b>
3.9	RECEIVER SPURIOUS RADIATION (RADIATED).....	46
3.9.1	LIMIT OF RECEIVER SPURIOUS RADIATION.....	46
3.9.2	TEST PROCEDURES.....	46
3.9.3	DEVIATION FROM TEST STANDARD.....	46
3.9.4	TEST SETUP.....	46
3.9.5	TEST RESULTS.....	47
3.9.6	TEST RESULTS (A).....	48
3.9.7	TEST RESULTS (B).....	49
3.10	RECEIVER SPURIOUS RADIATION (CONDUCTED).....	50
3.10.1	LIMIT OF RECEIVER SPURIOUS RADIATION.....	50
3.10.2	TEST PROCEDURES.....	50
3.10.3	DEVIATION FROM TEST STANDARD.....	50
3.10.4	TEST SETUP.....	50
3.10.5	TEST RESULTS.....	51
4.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	53
5.	INFORMATION ON THE TESTING LABORATORIES.....	54



## 1. CERTIFICATION

**PRODUCT :** 2.4GHz wireless PCI  
**MODEL NO. :** F5D7000  
**BRAND NAME :** Belkin  
**APPLICANT :** Belkin Corporation  
**STANDARDS :** EN 300 328-2 (07-2000)

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from Feb. 20~ Feb. 24, 2003. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

**CHECKED BY:** Kelsey Chang **DATE:** March 14, 2003  
Kelsey Chang

**APPROVED BY:** Dr. Alan Lane **DATE:** March 14, 2003  
Dr. Alan Lane  
Manager

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	2.4GHz wireless PCI
<b>MODEL NO.</b>	F5D7000
<b>SOURCE VOLTAGE</b>	$V_{nom} = 230$ $V_{min} = 207$ $V_{max} = 253$
<b>POWER SUPPLY</b>	3.3VDC from host equipment
<b>RATED RF OUTPUT POWER</b>	18.69dBm (Measured Max. Average) 22.87dBm (Measured Max. Peak)
<b>MODULATION TYPE</b>	CCK, QPSK, DBPSK (DSSS), OFDM
<b>BIT RATE OF TRANSMITTER</b>	up to 54Mbps
<b>OPERATING FREQUENCY</b>	2.412GHz ~ 2.472GHz
<b>NUMBER OF CHANNEL</b>	13
<b>CHANNEL SPACING</b>	5MHz
<b>L.O. FREQUENCY</b>	VCO freq.=2/3 fundamental freq.
<b>ANTENNA TYPE</b>	Dipole antenna
<b>TEMPERATURE RANGE</b>	0°C ~ 55°C
<b>DATA CABLE</b>	NA
<b>I/O PORTS</b>	NA
<b>ASSOCIATED DEVICES</b>	NA

#### NOTE:

1. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
2. The EUT complies with IEEE 802.11g draft standards, and backwards compatible with IEEE 802.11b products.
3. For more detailed features description, please refer to the manufacturer's specifications or User's Manual.

## **2.2 DESCRIPTION OF TEST MODES**

The EUT (2.4GHz wireless PCI) has been tested under operating and standby condition. Software used to control the EUT for staying in continuous transmitting and receiving mode is programmed. Channel 1, 7, 10 and 13 are chosen for testing to fulfill the requirement of frequency spectrum usage in each country.

Two test result were presented in the following sections, test result A is for transfer rate 11Mbps with CCK technique and test result B is for transfer rate 54Mbps with OFDM technique

## **2.3 GENERAL DESCRIPTION OF APPLIED STANDARDS**

The EUT is a 2.4GHz wireless PCI, according to the specifications of the manufacturers, it must comply with the requirements of the following standards:

### **EN 300 328-2 (07-2000)**

All tests have been performed and recorded as per the above standards.

## 2.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	PERSONAL COMPUTER	HP	Brio BA410	SG12902766	FCC DoC APPROVED
2	LCD MONITOR	ADI	LD-522N	1140A1T00100365A	FCC DoC APPROVED
3	KEYBOARD	BTC	5121W	H013001162	E5XKB5121WTH0110
4	PS2 MOUSE	HP	M-S48a	LZC20508276AW	JNZ201213

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.8 m braid shielded wire, terminated with VGA connector via metallic frame, w/o core.
3	1.6 m foil shielded wire, terminated with PS/2 connector via metallic frame, w/o core.
4	1.8 m Non shielded wire, terminated with PS/2 connector via drain wire, w/o core.

**NOTE:** All power cords of the above support units are non shielded (1.8m).

## 2.5 CONFIGURATION OF SYSTEM UNDER TEST

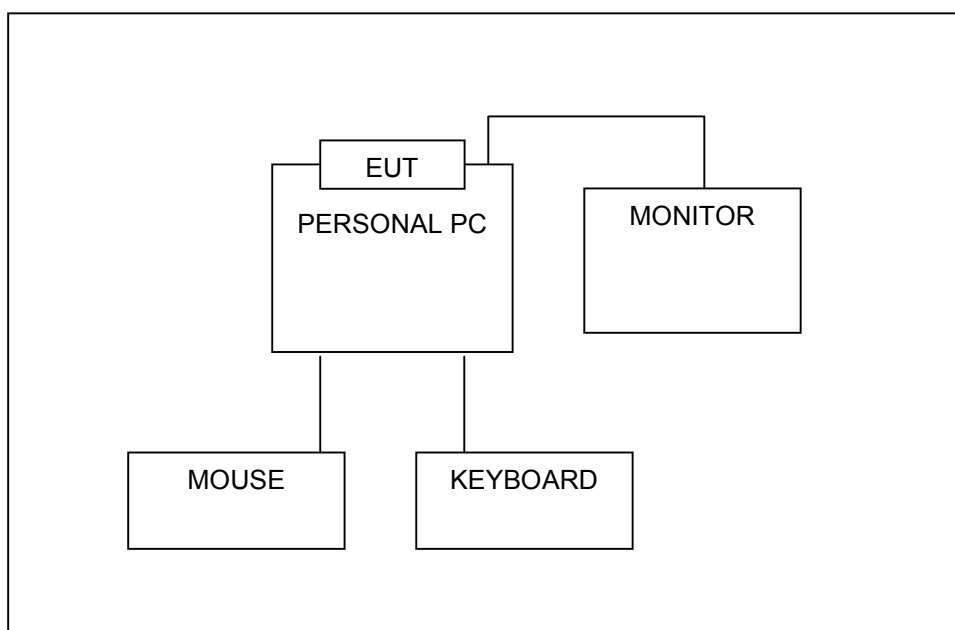

## 2.6 LIST OF MEASUREMENTS

Clause	Test Parameter	Remarks
	<b>TRANSMITTER PARAMETERS</b>	
7.2.1	Effective Radiated Power	Applicable
7.2.1	Effective Conducted Power	Applicable
7.2.2	Peak Power Density (FHSS Equipment)	Not Applicable
7.2.2	Peak Power Density (DSSS Equipment – Radiated)	Applicable
7.2.2	Peak Power Density (DSSS Equipment – Conducted)	Applicable
7.2.3	Frequency Range of Equipment Using FHSS Modulation	Not Applicable
7.2.4	Frequency Range of Equipment Using Other Forms Of Modulation	Applicable See Note 2
7.2.5	Spurious Emissions (Operating – Radiated)	Applicable
7.2.5	Spurious Emissions (Standby – Radiated)	See Note 1
7.2.5	Spurious Emissions (Operating – Conducted)	Applicable
7.2.5	Spurious Emissions (Standby – Conducted)	See Note 1
	<b>RECEIVER PARAMETERS</b>	
9.1	Spurious Emissions (Radiated)	Applicable
9.2	Spurious Emissions (Conducted)	Applicable

**NOTE:**

1. The emission of the transmitter on standby mode is equal to that of receiving mode.
2. Additionally, channel 10 was recorded, for showing effective use of frequency spectrum on France.



### 3. TEST PROCEDURES AND RESULTS

#### TRANSMITTER PARAMETERS

#### 3.1 EFFECTIVE RADIATED POWER (RADIATED)

##### 3.1.1 LIMITS OF EFFECTIVE RADIATED POWER

Condition	Limit
Under all test conditions	Av: 20 dBm / -10 dBW Pk: 23 dBm / -7 dBW

##### 3.1.2 TEST PROCEDURES

Please refer to item 7 of the standard.

##### 3.1.3 DEVIATION FROM TEST STANDARD

No deviation

##### 3.1.4 TEST SETUP

The test setup has been constructed as the normal use condition. The EUT has been connected with PC and placed on the turn table. Controlling software has been activated to set the EUT on specific status.

### 3.1.5 TEST RESULTS (A)

<b>EUT</b>	2.4GHz wireless PCI	<b>Model</b>	F5D7000
<b>Modulation bit rate</b>	11Mbps	<b>Duty cycle of EUT</b>	100 %
<b>Environmental Conditions</b>	20deg. C,66%RH	<b>Tested By</b>	Hardaway Lee

TEST CONDITION				TRANSMITTER PEAK POWER (dBm)							
				(CH1) 2412 MHz		(CH7) 2442 MHz		(CH10) 2457 MHz		(CH13) 2472 MHz	
				PK	AV	PK	AV	PK	AV	PK	AV
Tnom(°C)	20	Vnom(v)	230 V	11.37	9.26	11.50	10.05	12.65	11.48	14.28	12.78
Tmin(°C)	0	Vmin(v)	207 V	10.33	7.58	12.16	10.08	12.74	11.05	14.40	12.27
		Vmax(v)	253 V	10.33	7.58	12.16	10.08	12.74	11.05	14.40	12.27
Tmax(°C)	55	Vmin(v)	207 V	6.33	3.46	7.98	5.83	8.76	6.92	10.57	8.32
		Vmax(v)	253 V	6.33	3.46	7.98	5.83	8.76	6.92	10.57	8.32

### 3.1.6 TEST RESULTS (B)

<b>EUT</b>	2.4GHz wireless PCI	<b>Model</b>	F5D7000
<b>Modulation bit rate</b>	54Mbps	<b>Duty cycle of EUT</b>	100 %
<b>Environmental Conditions</b>	20deg. C,66%RH	<b>Tested By</b>	Hardaway Lee

TEST CONDITION				TRANSMITTER PEAK POWER (dBm)							
				(CH1) 2412 MHz		(CH7) 2442 MHz		(CH10) 2457 MHz		(CH13) 2472 MHz	
				PK	AV	PK	AV	PK	AV	PK	AV
Tnom(°C)	20	Vnom(v)	230 V	14.64	9.31	16.68	10.82	17.46	11.66	18.35	12.22
Tmin(°C)	0	Vmin(v)	207 V	19.61	14.04	22.49	17.17	22.44	18.09	22.87	18.69
		Vmax(v)	253 V	19.61	14.04	22.49	17.17	22.44	18.09	22.87	18.69
Tmax(°C)	55	Vmin(v)	207 V	9.58	4.24	12.64	6.46	12.58	6.37	13.82	7.20
		Vmax(v)	253 V	9.58	4.24	12.64	6.46	12.58	6.37	13.82	7.20

## 3.2 EFFECTIVE RADIATED POWER (CONDUCTED)

### 3.2.1 LIMITS OF EFFECTIVE RADIATED POWER

Condition	Limit
Under all test conditions	Av: 20 dBm / -10 dBW Pk: 23 dBm / -7 dBW

### 3.2.2 TEST PROCEDURES

Please refer to item 7 of the standard.

### 3.2.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.2.4 TEST SETUP

The test setup has been constructed as the normal use condition. The EUT has been connected with PC and placed on the turn table. Controlling software has been activated to set the EUT on specific status.

### 3.2.5 TEST RESULTS (A)

<b>EUT</b>	2.4GHz wireless PCI	<b>Model</b>	F5D7000
<b>Modulation bit rate</b>	11Mbps	<b>Duty cycle of EUT</b>	100 %
<b>Environmental Conditions</b>	20deg. C,66%RH	<b>Tested By</b>	Hardaway Lee

TEST CONDITION				TRANSMITTER PEAK POWER (dBm)							
				(CH1) 2412 MHz		(CH7) 2442 MHz		(CH10) 2457 MHz		(CH13) 2472 MHz	
				PK	AV	PK	AV	PK	AV	PK	AV
Tnom(°C)	20	Vnom(v)	230 V	9.32	4.61	9.22	5.23	8.30	5.75	8.26	5.05
Tmin(°C)	0	Vmin(v)	207 V	8.28	2.93	9.88	5.26	8.39	5.32	8.38	4.54
		Vmax(v)	253 V	8.28	2.93	9.88	5.26	8.39	5.32	8.38	4.54
Tmax(°C)	55	Vmin(v)	207 V	4.28	-1.19	5.70	1.01	4.41	1.19	4.55	0.59
		Vmax(v)	253 V	4.28	-1.19	5.70	1.01	4.41	1.19	4.55	0.59

### 3.2.6 TEST RESULTS (B)

<b>EUT</b>	2.4GHz wireless PCI	<b>Model</b>	F5D7000
<b>Modulation bit rate</b>	54Mbps	<b>Duty cycle of EUT</b>	100 %
<b>Environmental Conditions</b>	20deg. C,66%RH	<b>Tested By</b>	Hardaway Lee

TEST CONDITION				TRANSMITTER PEAK POWER (dBm)							
				(CH1) 2412 MHz		(CH7) 2442 MHz		(CH10) 2457 MHz		(CH13) 2472 MHz	
				PK	AV	PK	AV	PK	AV	PK	AV
Tnom(°C)	20	Vnom(v)	230 V	3.92	2.90	5.34	4.97	5.71	5.23	6.43	5.27
Tmin(°C)	0	Vmin(v)	207 V	11.39	10.13	13.65	13.02	13.19	14.16	13.71	13.01
		Vmax(v)	253 V	11.39	10.13	13.65	13.02	13.19	14.16	13.71	13.01
Tmax(°C)	55	Vmin(v)	207 V	1.36	0.33	3.80	3.11	3.33	2.44	4.40	2.75
		Vmax(v)	253 V	1.36	0.33	3.80	3.11	3.33	2.44	4.40	2.75

### 3.3 PEAK POWER DENSITY (DSSS EQUIPMENT) (RADIATED)

#### 3.3.1 LIMIT OF PEAK POWER DENSITY

Condition	Limit
Under all test conditions	20dBm / 100 KHz (FHSS)
	10dBm / 1 MHz (DSSS)

#### 3.3.2 TEST PROCEDURES

Please refer to item 7 of the standard.

#### 3.3.3 DEVIATION FROM TEST STANDARD

No deviation

#### 3.3.4 TEST SETUP

The EUT has been programmed to continuously transmit in certain channel during test.

### 3.3.5 TEST RESULTS (A)

<b>EUT</b>	2.4GHz wireless PCI	<b>Model</b>	F5D7000
<b>Modulation bit rate</b>	11Mbps		
<b>Environmental Conditions</b>	20deg. C,66%RH	<b>Tested By</b>	Hardaway Lee

<b>Channel Number</b>	<b>Channel Frequency (MHz)</b>	<b>RF Power (dBm/KHz)</b>	<b>Limit (dBm/kHz)</b>	<b>PASS/FAIL</b>
1	2415.2401	0.53/1000	10/1000	PASS
7	2443.3997	1.59/1000	10/1000	PASS
10	2454.0034	2.71/1000	10/1000	PASS
13	2474.4944	2.42/1000	10/1000	PASS

#### NOTE

1. For equipment using FHSS modulation, the power density shall be limit to  $-10\text{dBW}(100\text{mW})$  per 100kHz e.i.r.p.
2. For equipment using other types of modulation, the peak power shall be limit to  $-20\text{dBW}(10\text{mW})$  per MHz e.i.r.p.



### 3.3.6 TEST RESULTS (B)

<b>EUT</b>	2.4GHz wireless PCI	<b>Model</b>	F5D7000
<b>Modulation bit rate</b>	54Mbps		
<b>Environmental Conditions</b>	20deg. C,66%RH	<b>Tested By</b>	Hardaway Lee

<b>Channel Number</b>	<b>Channel Frequency (MHz)</b>	<b>RF Power (dBm/KHz)</b>	<b>Limit (dBm/kHz)</b>	<b>PASS/FAIL</b>
1	2417.0539	1.49/1000	10/1000	PASS
7	2446.7407	-0.60/1000	10/1000	PASS
10	2461.9411	-0.06/1000	10/1000	PASS
13	2476.8503	0.19/1000	10/1000	PASS

#### NOTE

1. For equipment using FHSS modulation, the power density shall be limit to  $-10\text{dBW}(100\text{mW})$  per 100kHz e.i.r.p.
2. For equipment using other types of modulation, the peak power shall be limit to  $-20\text{dBW}(10\text{mW})$  per MHz e.i.r.p.

### 3.4 PEAK POWER DENSITY (DSSS EQUIPMENT) (CONDUCTED)

#### 3.4.1 LIMIT OF PEAK POWER DENSITY

Condition	Limit
Under all test conditions	20dBm / 100 KHz (FHSS) 10dBm / 1 MHz (DSSS)

#### 3.4.2 TEST PROCEDURES

Please refer to item 7 of the standard.

#### 3.4.3 DEVIATION FROM TEST STANDARD

No deviation

#### 3.4.4 TEST SETUP

The EUT has been programmed to continuously transmit in certain channel during test.

### 3.4.5 TEST RESULTS (A)

<b>EUT</b>	2.4GHz wireless PCI	<b>Model</b>	F5D7000
<b>Modulation bit rate</b>	11Mbps		
<b>Environmental Conditions</b>	20deg. C,66%RH	<b>Tested By</b>	Hardaway Lee

<b>Channel Number</b>	<b>Channel Frequency (MHz)</b>	<b>RF Power (dBm/KHz)</b>	<b>Limit (dBm/kHz)</b>	<b>PASS/FAIL</b>
1	2415.2378	2.17/1000	10/1000	PASS
7	2445.3583	2.21/1000	10/1000	PASS
10	2454.5733	2.65/1000	10/1000	PASS
13	2474.4330	2.36/1000	10/1000	PASS

#### NOTE

1. For equipment using FHSS modulation, the power density shall be limit to  $-10\text{dBW}(100\text{mW})$  per 100kHz e.i.r.p.
2. For equipment using other types of modulation, the peak power shall be limit to  $-20\text{dBW}(10\text{mW})$  per MHz e.i.r.p.

### 3.4.6 TEST RESULTS (B)

<b>EUT</b>	2.4GHz wireless PCI	<b>Model</b>	F5D7000
<b>Modulation bit rate</b>	54Mbps		
<b>Environmental Conditions</b>	20deg. C,66%RH	<b>Tested By</b>	Hardaway Lee

<b>Channel Number</b>	<b>Channel Frequency (MHz)</b>	<b>RF Power (dBm/KHz)</b>	<b>Limit (dBm/kHz)</b>	<b>PASS/FAIL</b>
1	2416.7533	-7.46/1000	10/1000	PASS
7	2446.8409	-5.121000	10/1000	PASS
10	2461.8033	-7.66/1000	10/1000	PASS
13	2476.9148	-7.741000	10/1000	PASS

#### NOTE

1. For equipment using FHSS modulation, the power density shall be limit to  $-10\text{dBW}(100\text{mW})$  per 100kHz e.i.r.p.
2. For equipment using other types of modulation, the peak power shall be limit to  $-20\text{dBW}(10\text{mW})$  per MHz e.i.r.p.

### 3.5 FREQUENCY RANGE (DSSS EQUIPMENT) (RADIATED)

#### 3.5.1 LIMIT OF FREQUENCY RANGE

Condition	Country	Limit
Under all test conditions	France	$F_L \geq 2446.5\text{MHz}$ $F_H \leq 2483.5\text{ MHz}$
	EU	$F_L \geq 2400.0\text{MHz}$ $F_H \leq 2483.5\text{ MHz}$

#### 3.5.2 TEST PROCEDURES

Please refer to item 7 of the standard.

#### 3.5.3 DEVIATION FROM TEST STANDARD

No deviation

#### 3.5.4 TEST SETUP

The EUT and probe antenna was placed into the temperature oven. The probe has to be connected with spectrum analyzer. The power source of the EUT has to be connected with the power supply for voltage change. The frequency has to be recorded for the right and left end above threshold of highest and lowest channel respectively.

### 3.5.5 TEST RESULTS (A)

<b>EUT</b>	2.4GHz wireless PCI	<b>Model</b>	F5D7000
<b>Channel</b>	10 ~ 13 (for France)		
<b>Environmental Conditions</b>	20deg. C, 66%RH	<b>Tested By</b>	Hardaway Lee

TEST CONDITIONS			FREQUENCY (MHz)	
			Lowest	Highest
Tnom 20°C	Vnom(v)	230	2449.57	2479.45
Tmin 0°C	Vmin(v)	207	2449.88	2479.25
	Vmax(v)	253	2449.88	2479.25
Tmax 55°C	Vmin(v)	207	2450.18	2478.53
	Vmax(v)	253	2450.18	2478.53
Measured frequencies (lowest and highest)			$F_L = 2449.57$	$F_H = 2479.45$

#### NOTE

- 1.For France market, only channel 10 ~ 13 are allowed. So, only lowest edge of channel 10 and highest edge of channel 13 under extreme condition are recorded in the above table.
- 2.The E.U.T is a stand alone radio device (see the clause 6.2.2). The host equipment is powered by the AC adapter. So, the AC power is used as the extreme voltage source.

<b>EUT</b>	2.4GHz wireless PCI	<b>Model</b>	F5D7000
<b>Channel</b>	1 ~ 13 (for other EU countries)		
<b>Environmental Conditions</b>	20deg. C, 66%RH	<b>Tested By</b>	Hardaway Lee

TEST CONDITIONS			FREQUENCY (MHz)	
			Lowest	Highest
Tnom 20°C	Vnom(v)	230	2404.57	2479.45
Tmin 0°C	Vmin(v)	207	2405.10	2479.25
	Vmax(v)	253	2405.10	2479.25
Tmax 55°C	Vmin(v)	207	2405.37	2478.53
	Vmax(v)	253	2405.37	2478.53
Measured frequencies (lowest and highest)			$F_L = 2404.57$	$F_H = 2479.45$

**NOTE**

- 1.For EU market, only channel 1 ~ 13 are allowed. So, only lowest edge of channel 1 and highest edge of channel 13 under extreme condition are recorded in the above table.
- 2.The E.U.T is a stand alone radio device (see the clause 6.2.2). The host equipment is powered by the AC Adapter. So, the AC power is used as the extreme voltage source. (see clause 6.3.2.1)

### 3.5.6 TEST RESULTS (B)

<b>EUT</b>	2.4GHz wireless PCI	<b>Model</b>	F5D7000
<b>Channel</b>	10 ~ 13 (for France)		
<b>Environmental Conditions</b>	20deg. C, 66%RH	<b>Tested By</b>	Hardaway Lee

TEST CONDITIONS			FREQUENCY (MHz)	
			Lowest	Highest
Tnom 20°C	Vnom(v)	230	2447.67	2481.27
Tmin 0°C	Vmin(v)	207	2446.58	2482.25
	Vmax(v)	253	2446.58	2482.25
Tmax 55°C	Vmin(v)	207	2447.97	2481.05
	Vmax(v)	253	2447.97	2481.05
Measured frequencies (lowest and highest)			$F_L = 2446.58$	$F_H = 2482.25$

#### NOTE

- 1.For France market, only channel 10 ~ 13 are allowed. So, only lowest edge of channel 10 and highest edge of channel 13 under extreme condition are recorded in the above table.
- 2.The E.U.T is a stand alone radio device (see the clause 6.2.2). The host equipment is powered by the AC adapter. So, the AC power is used as the extreme voltage source.



<b>EUT</b>	2.4GHz wireless PCI	<b>Model</b>	F5D7000
<b>Channel</b>	1 ~ 13 (for other EU countries)		
<b>Environmental Conditions</b>	20deg. C, 66%RH	<b>Tested By</b>	Hardaway Lee

TEST CONDITIONS			FREQUENCY (MHz)	
			Lowest	Highest
Tnom 20°C	Vnom(v)	230	2402.98	2481.27
Tmin 0°C	Vmin(v)	207	2401.83	2482.25
	Vmax(v)	253	2401.83	2482.25
Tmax 55°C	Vmin(v)	207	2403.02	2481.05
	Vmax(v)	253	2403.02	2481.05
Measured frequencies (lowest and highest)			F <sub>L</sub> = 2401.83	F <sub>H</sub> = 2482.25

**NOTE**

- 1.For EU market, only channel 1 ~ 13 are allowed. So, only lowest edge of channel 1 and highest edge of channel 13 under extreme condition are recorded in the above table.
- 2.The E.U.T is a stand alone radio device (see the clause 6.2.2). The host equipment is powered by the AC Adapter. So, the AC power is used as the extreme voltage source. (see clause 6.3.2.1)

### 3.6 FREQUENCY RANGE (DSSS EQUIPMENT) (CONDUCTED)

#### 3.6.1 LIMIT OF FREQUENCY RANGE

Condition	Country	Limit
Under all test conditions	France	$F_L \geq 2446.5\text{MHz}$ $F_H \leq 2483.5\text{ MHz}$
	EU	$F_L \geq 2400.0\text{MHz}$ $F_H \leq 2483.5\text{ MHz}$

#### 3.6.2 TEST PROCEDURES

Please refer to item 7 of the standard.

#### 3.6.3 DEVIATION FROM TEST STANDARD

No deviation

#### 3.6.4 TEST SETUP

The EUT and probe antenna was placed into the temperature oven. The probe has to be connected with spectrum analyzer. The power source of the EUT has to be connected with the power supply for voltage change. The frequency has to be recorded for the right and left end above threshold of highest and lowest channel respectively.

### 3.6.5 TEST RESULTS (A)

<b>EUT</b>	2.4GHz wireless PCI	<b>Model</b>	F5D7000
<b>Channel</b>	10 ~ 13 (for France)		
<b>Environmental Conditions</b>	20deg. C, 66%RH	<b>Tested By</b>	Hardaway Lee

TEST CONDITIONS			FREQUENCY (MHz)	
			Lowest	Highest
Tnom 20°C	Vnom(v)	230	2449.57	2479.45
Tmin 0°C	Vmin(v)	207	2449.88	2479.25
	Vmax(v)	253	2449.88	2479.25
Tmax 55°C	Vmin(v)	207	2450.18	2478.53
	Vmax(v)	253	2450.18	2478.53
Measured frequencies (lowest and highest)			$F_L = 2449.57$	$F_H = 2479.45$

#### NOTE

1. For France market, only channel 10 ~ 13 are allowed. So, only lowest edge of channel 10 and highest edge of channel 13 under extreme condition are recorded in the above table.
2. The E.U.T is a stand alone radio device (see the clause 6.2.2). The host equipment is powered by the AC adapter. So, the AC power is used as the extreme voltage source.

<b>EUT</b>	2.4GHz wireless PCI	<b>Model</b>	F5D7000
<b>Channel</b>	1 ~ 13 (for other EU countries)		
<b>Environmental Conditions</b>	20deg. C, 66%RH	<b>Tested By</b>	Hardaway Lee

TEST CONDITIONS			FREQUENCY (MHz)	
			Lowest	Highest
Tnom 20°C	Vnom(v)	230	2404.57	2479.45
Tmin 0°C	Vmin(v)	207	2405.10	2479.25
	Vmax(v)	253	2405.10	2479.25
Tmax 55°C	Vmin(v)	207	2405.37	2478.53
	Vmax(v)	253	2405.37	2478.53
Measured frequencies (lowest and highest)			$F_L = 2404.57$	$F_H = 2479.45$

**NOTE**

1. For EU market, only channel 1 ~ 13 are allowed. So, only lowest edge of channel 1 and highest edge of channel 13 under extreme condition are recorded in the above table.
2. The E.U.T is a stand alone radio device (see the clause 6.2.2). The host equipment is powered by the AC Adapter. So, the AC power is used as the extreme voltage source. (see clause 6.3.2.1)

### 3.6.6 TEST RESULTS (B)

<b>EUT</b>	2.4GHz wireless PCI	<b>Model</b>	F5D7000
<b>Channel</b>	10 ~ 13 (for France)		
<b>Environmental Conditions</b>	20deg. C, 66%RH	<b>Tested By</b>	Hardaway Lee

TEST CONDITIONS			FREQUENCY (MHz)	
			Lowest	Highest
Tnom 20°C	Vnom(v)	230	2447.67	2481.27
Tmin 0°C	Vmin(v)	207	2446.58	2482.25
	Vmax(v)	253	2446.58	2482.25
Tmax 55°C	Vmin(v)	207	2447.97	2481.05
	Vmax(v)	253	2447.97	2481.05
Measured frequencies (lowest and highest)			$F_L = 2446.58$	$F_H = 2482.25$

#### NOTE

- 1.For France market, only channel 10 ~ 13 are allowed. So, only lowest edge of channel 10 and highest edge of channel 13 under extreme condition are recorded in the above table.
- 2.The E.U.T is a stand alone radio device (see the clause 6.2.2). The host equipment is powered by the AC adapter. So, the AC power is used as the extreme voltage source.

<b>EUT</b>	2.4GHz wireless PCI	<b>Model</b>	F5D7000
<b>Channel</b>	1 ~ 13 (for other EU countries)		
<b>Environmental Conditions</b>	20deg. C, 66%RH	<b>Tested By</b>	Hardaway Lee

TEST CONDITIONS			FREQUENCY (MHz)	
			Lowest	Highest
Tnom 20°C	Vnom(v)	230	2402.98	2481.27
Tmin 0°C	Vmin(v)	207	2401.83	2482.25
	Vmax(v)	253	2401.83	2482.25
Tmax 55°C	Vmin(v)	207	2403.02	2481.05
	Vmax(v)	253	2403.02	2481.05
Measured frequencies (lowest and highest)			F <sub>L</sub> = 2401.83	F <sub>H</sub> = 2482.25

**NOTE**

1. For EU market, only channel 1 ~ 13 are allowed. So, only lowest edge of channel 1 and highest edge of channel 13 under extreme condition are recorded in the above table.
2. The E.U.T is a stand alone radio device (see the clause 6.2.2). The host equipment is powered by the AC Adapter. So, the AC power is used as the extreme voltage source. (see clause 6.3.2.1)

### 3.7 TRANSMITTER SPURIOUS EMISSIONS (RADIATED)

#### 3.7.1 LIMITS OF TRANSMITTER SPURIOUS EMISSIONS

##### Transmitter limits for narrowband spurious emissions

Frequency Range	Operating Limit	Standby Limit
30MHz ~ 1GHz	-36dBm	-57dBm
Above 1GHz ~ 12.75GHz	-30dBm	-47dBm
1.8~1.9GHz 5.15~5.3GHz	-47dBm	-47dBm

#### 3.7.2 TEST PROCEDURES

Please refer to item 7 of the standard.

#### 3.7.3 DEVIATION FROM TEST STANDARD

No deviation

#### 3.7.4 TEST SETUP

For the actual test configuration, please refer to the related Item in this test report ( Photographs of the Test Configuration ).

### 3.7.5 TEST RESULTS

<b>EUT</b>	2.4GHz wireless PCI	<b>Model</b>	F5D7000
<b>Frequency Range</b>	Below 1GHz		
<b>Environmental Conditions</b>	25deg. C , 70%RH	<b>Tested By</b>	Hardaway Lee

SPURIOUS EMISSION LEVEL				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (Dbm)	Margin
84.11	H	-70.7	-36.00	-34.70
100.34	H	-68.6	-36.00	-32.60
174.47	H	-69.1	-36.00	-33.10
174.47	V	-68.6	-36.00	-32.60
200.44	V	-67.0	-36.00	-31.00
250.22	V	-69.7	-36.00	-33.70
479.56	H	-64.0	-36.00	-28.00
479.56	V	-66.9	-36.00	-30.90
527.25	H	-68.4	-36.00	-32.40
527.25	V	-70.8	-36.00	-34.80
664.73	V	-63.3	-36.00	-27.30
997.19	H	-55.5	-36.00	-19.50

**NOTE:** The emission behavior belongs to narrowband spurious emission.



### 3.7.6 TEST RESULTS (A)

<b>EUT</b>	2.4GHz wireless PCI	<b>Model</b>	F5D7000
<b>Channel</b>	1		
<b>Environmental Conditions</b>	25deg. C , 70%RH	<b>Tested By</b>	Hardaway Lee

<b>SPURIOUS EMISSION LEVEL</b>				
<b>Frequency (MHz)</b>	<b>Antenna Polarization</b>	<b>Level (dBm)</b>	<b>Limit (dBm)</b>	<b>Margin</b>
1607.64	H	-72.7	-30.00	-42.70
1607.93	V	-70.7	-30.00	-40.70
3215.91	V	-61.0	-30.00	-31.00
3215.93	H	-57.7	-30.00	-27.70
4823.84	H	-72.5	-30.00	-42.50
4823.88	V	-70.1	-30.00	-40.10
6431.33	H	-59.4	-30.00	-29.40
6431.95	V	-60.6	-30.00	-30.60
7235.53	V	-67.5	-30.00	-37.50
7236.44	H	-68.1	-30.00	-38.10
9648.35	V	-64.4	-30.00	-34.40
9648.47	H	-64.7	-30.00	-34.70

**NOTE:** The emission behavior belongs to narrowband spurious emission.

<b>EUT</b>	2.4GHz wireless PCI	<b>Model</b>	F5D7000
<b>Channel</b>	7		
<b>Environmental Conditions</b>	25deg. C , 70%RH	<b>Tested By</b>	Hardaway Lee

<b>SPURIOUS EMISSION LEVEL</b>				
<b>Frequency (MHz)</b>	<b>Antenna Polarization</b>	<b>Level (dBm)</b>	<b>Limit (dBm)</b>	<b>Margin</b>
1627.93	V	-69.5	-30.00	-39.50
1627.94	H	-72.7	-30.00	-42.70
3255.92	V	-63.7	-30.00	-33.70
3256.98	H	-67.0	-30.00	-37.00
4883.87	V	-70.0	-30.00	-40.00
4883.91	H	-71.4	-30.00	-41.40
6512.05	V	-61.5	-30.00	-31.50
6513.42	H	-61.1	-30.00	-31.10
7325.81	H	-66.0	-30.00	-36.00
7326.43	V	-66.0	-30.00	-36.00
8139.32	V	-58.1	-30.00	-28.10
9768.41	H	-64.9	-30.00	-34.90

**NOTE:** The emission behavior belongs to narrowband spurious emission.



<b>EUT</b>	2.4GHz wireless PCI	<b>Model</b>	F5D7000
<b>Channel</b>	10		
<b>Environmental Conditions</b>	25deg. C , 70%RH	<b>Tested By</b>	Hardaway Lee

<b>SPURIOUS EMISSION LEVEL</b>				
<b>Frequency (MHz)</b>	<b>Antenna Polarization</b>	<b>Level (dBm)</b>	<b>Limit (dBm)</b>	<b>Margin</b>
1637.49	H	-72.1	-30.00	-42.10
1637.96	V	-69.5	-30.00	-39.50
3275.91	V	-65.2	-30.00	-35.20
3275.92	H	-62.0	-30.00	-32.00
4913.89	H	-71.5	-30.00	-41.50
4913.89	V	-69.5	-30.00	-39.50
6551.56	V	-59.9	-30.00	-29.90
6551.64	H	-59.8	-30.00	-29.80
7370.62	H	-65.0	-30.00	-35.00
7370.76	V	-65.8	-30.00	-35.80
9827.93	H	-64.4	-30.00	-34.40

**NOTE:** The emission behavior belongs to narrowband spurious emission.

<b>EUT</b>	2.4GHz wireless PCI	<b>Model</b>	F5D7000
<b>Channel</b>	13		
<b>Environmental Conditions</b>	25deg. C , 70%RH	<b>Tested By</b>	Hardaway Lee

<b>SPURIOUS EMISSION LEVEL</b>				
<b>Frequency (MHz)</b>	<b>Antenna Polarization</b>	<b>Level (dBm)</b>	<b>Limit (dBm)</b>	<b>Margin</b>
1647.93	H	-76.8	-30.00	-46.80
1647.95	V	-83.7	-30.00	-53.70
3295.90	H	-68.4	-30.00	-38.40
3295.93	V	-74.6	-30.00	-44.60
4943.91	V	-68.9	-30.00	-38.90
4944.29	H	-72.5	-30.00	-42.50
6591.48	H	-60.8	-30.00	-30.80
7416.41	H	-65.5	-30.00	-35.50
7416.87	V	-66.0	-30.00	-36.00
9887.64	H	-64.8	-30.00	-34.80
9888.86	V	-64.0	-30.00	-34.00

**NOTE:** The emission behavior belongs to narrowband spurious emission.

### 3.7.7 TEST RESULTS (B)

<b>EUT</b>	2.4GHz wireless PCI	<b>Model</b>	F5D7000
<b>Channel</b>	1		
<b>Environmental Conditions</b>	25deg. C , 70%RH	<b>Tested By</b>	Hardaway Lee

SPURIOUS EMISSION LEVEL				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin
1607.48	H	-85.6	-30.00	-55.60
1607.94	V	-75.0	-30.00	-45.00
3215.91	V	-61.3	-30.00	-31.30
3215.93	H	-76.7	-30.00	-46.70
4823.90	H	-64.2	-30.00	-34.20
4832.47	V	-72.5	-30.00	-42.50
6431.89	V	-61.3	-30.00	-31.30
6431.92	H	-66.2	-30.00	-36.20
7235.28	H	-67.6	-30.00	-37.60
7257.79	V	-66.9	-30.00	-36.90
9650.47	H	-65.1	-30.00	-35.10
9668.79	V	-65.4	-30.00	-35.40

**NOTE:** The emission behavior belongs to narrowband spurious emission.

<b>EUT</b>	2.4GHz wireless PCI	<b>Model</b>	F5D7000
<b>Channel</b>	7		
<b>Environmental Conditions</b>	25deg. C , 70%RH	<b>Tested By</b>	Hardaway Lee

<b>SPURIOUS EMISSION LEVEL</b>				
<b>Frequency (MHz)</b>	<b>Antenna Polarization</b>	<b>Level (dBm)</b>	<b>Limit (dBm)</b>	<b>Margin</b>
1627.62	H	-85.1	-30.00	-55.10
1628.28	V	-85.2	-30.00	-55.20
3256.56	H	-77.4	-30.00	-47.40
4069.41	V	-74.6	-30.00	-44.60
4883.35	V	-72.1	-30.00	-42.10
4883.88	H	-56.5	-30.00	-26.50
6512.82	V	-68.2	-30.00	-38.20
6512.91	H	-67.9	-30.00	-37.90
7325.03	V	-66.6	-30.00	-36.60
7326.83	H	-65.7	-30.00	-35.70
9766.89	V	-64.8	-30.00	-34.80
9767.39	H	-65.3	-30.00	-35.30

**NOTE:** The emission behavior belongs to narrowband spurious emission.

<b>EUT</b>	2.4GHz wireless PCI	<b>Model</b>	F5D7000
<b>Channel</b>	10		
<b>Environmental Conditions</b>	25deg. C , 70%RH	<b>Tested By</b>	Hardaway Lee

<b>SPURIOUS EMISSION LEVEL</b>				
<b>Frequency (MHz)</b>	<b>Antenna Polarization</b>	<b>Level (dBm)</b>	<b>Limit (dBm)</b>	<b>Margin</b>
1637.92	H	-86.6	-30.00	-56.60
1637.92	V	-77.9	-30.00	-47.90
3275.92	H	-72.6	-30.00	-42.60
3275.92	V	-66.6	-30.00	-36.60
4912.93	V	-72.8	-30.00	-42.80
4913.88	H	-64.5	-30.00	-34.50
6551.86	V	-61.2	-30.00	-31.20
7371.81	H	-65.0	-30.00	-35.00
7373.42	V	-65.0	-30.00	-35.00
9825.72	V	-64.3	-30.00	-34.30
9828.04	H	-64.9	-30.00	-34.90

**NOTE:** The emission behavior belongs to narrowband spurious emission.



<b>EUT</b>	2.4GHz wireless PCI	<b>Model</b>	F5D7000
<b>Channel</b>	13		
<b>Environmental Conditions</b>	25deg. C , 70%RH	<b>Tested By</b>	Hardaway Lee

<b>SPURIOUS EMISSION LEVEL</b>				
<b>Frequency (MHz)</b>	<b>Antenna Polarization</b>	<b>Level (dBm)</b>	<b>Limit (dBm)</b>	<b>Margin</b>
1648.00	V	-86.4	-30.00	-56.40
1648.25	H	-75.2	-30.00	-45.20
3295.89	V	-76.8	-30.00	-46.80
3296.18	H	-68.9	-30.00	-38.90
4942.51	V	-72.1	-30.00	-42.10
4943.62	H	-71.8	-30.00	-41.80
6591.87	V	-66.8	-30.00	-36.80
6592.43	H	-61.2	-30.00	-31.20
7414.65	V	-65.0	-30.00	-35.00
7415.75	H	-65.5	-30.00	-35.50
8240.06	V	-64.6	-30.00	-34.60
9888.24	H	-64.9	-30.00	-34.90
9889.73	V	-63.9	-30.00	-33.90

**NOTE:** The emission behavior belongs to narrowband spurious emission.



### 3.8 TRANSMITTER SPURIOUS EMISSIONS (CONDUCTED)

#### 3.8.1 LIMITS OF TRANSMITTER SPURIOUS EMISSIONS

##### Transmitter limits for narrowband spurious emissions

Frequency Range	Operating Limit	Standby Limit
30MHz ~ 1GHz	-36dBm	-57dBm
Above 1GHz ~ 12.75GHz	-30dBm	-47dBm
1.8~1.9GHz 5.15~5.3GHz	-47dBm	-47dBm

#### 3.8.2 TEST PROCEDURES

Please refer to item 7 of the standard.

#### 3.8.3 DEVIATION FROM TEST STANDARD

No deviation

#### 3.8.4 TEST SETUP

For the actual test configuration, please refer to the related Item in this test report ( Photographs of the Test Configuration ).

### 3.8.5 TEST RESULTS (A)

<b>EUT</b>	2.4GHz wireless PCI	<b>Model</b>	F5D7000
<b>Frequency Range</b>	Below 1GHz		
<b>Environmental Conditions</b>	25deg. C , 70%RH	<b>Tested By</b>	Hardaway Lee

<b>SPURIOUS EMISSION LEVEL</b>			
<b>Frequency (MHz)</b>	<b>Level (dBm)</b>	<b>Limit (dBm)</b>	<b>Margin</b>
974.73	-74.7	-36.00	-38.70

**NOTE:** The emission behavior belongs to narrowband spurious emission.

<b>EUT</b>	2.4GHz wireless PCI	<b>Model</b>	F5D7000
<b>Channel</b>	1, 7, 10, 13		
<b>Environmental Conditions</b>	25deg. C , 70%RH	<b>Tested By</b>	Hardaway Lee

<b>SPURIOUS EMISSION LEVEL</b>				
<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Level (dBm)</b>	<b>Limit (dBm)</b>	<b>Margin</b>
1	2396.79	-82.6	-30.00	-52.60
	3214.43	-70.6	-30.00	-40.60
	14797.60	-82.0	-30.00	-52.00
7	2430.86	-79.1	-30.00	-49.10
	3248.50	-79.6	-30.00	-49.60
10	2430.86	-76.3	-30.00	-46.30
	3248.50	-77.4	-30.00	-47.40
	4883.77	-79.6	-30.00	-49.60
13	2464.93	-72.4	-30.00	-42.40
	3282.57	-72.0	-30.00	-42.00
	4951.90	-80.6	-30.00	-50.60

**NOTE:** The emission behavior belongs to narrowband spurious emission.

### 3.8.6 TEST RESULTS (B)

<b>EUT</b>	2.4GHz wireless PCI	<b>Model</b>	F5D7000
<b>Frequency Range</b>	Below 1GHz		
<b>Environmental Conditions</b>	25deg. C , 70%RH	<b>Tested By</b>	Hardaway Lee

<b>SPURIOUS EMISSION LEVEL</b>			
<b>Frequency (MHz)</b>	<b>Level (dBm)</b>	<b>Limit (dBm)</b>	<b>Margin</b>
968.90	-71.0	-36.00	-35.00
978.62	-66.9	-36.00	-30.90

**NOTE:** The emission behavior belongs to narrowband spurious emission.

<b>EUT</b>	2.4GHz wireless PCI	<b>Model</b>	F5D7000
<b>Channel</b>	1, 7, 10, 13		
<b>Environmental Conditions</b>	25deg. C , 70%RH	<b>Tested By</b>	Hardaway Lee

<b>SPURIOUS EMISSION LEVEL</b>				
<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Level (dBm)</b>	<b>Limit (dBm)</b>	<b>Margin</b>
1	2839.68	-82.9	-30.00	-52.90
	3214.43	-70.4	-30.00	-40.40
	4815.63	-83.1	-30.00	-53.10
7	2430.86	-79.6	-30.00	-49.60
	3248.50	-78.4	-30.00	-48.40
	4883.77	-77.8	-30.00	-47.80
10	2430.86	-74.6	-30.00	-44.60
	3248.50	-75.7	-30.00	-45.70
	4917.84	-70.7	-30.00	-40.70
13	2464.93	-71.8	-30.00	-41.80
	3282.57	-70.5	-30.00	-40.50
	4951.90	-70.1	-30.00	-40.10

**NOTE:** The emission behavior belongs to narrowband spurious emission.

## RECEIVER PARAMETERS

### 3.9 RECEIVER SPURIOUS RADIATION (RADIATED)

#### 3.9.1 LIMIT OF RECEIVER SPURIOUS RADIATION

Narrowband spurious emission limits for receivers

Frequency Range	Limit
30MHz ~ 1GHz	-57dBm
Above 1GHz ~ 12.75GHz	-47dBm

#### 3.9.2 TEST PROCEDURES

Please refer to item 7 of the standard.

#### 3.9.3 DEVIATION FROM TEST STANDARD

No deviation

#### 3.9.4 TEST SETUP

For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration).

### 3.9.5 TEST RESULTS

<b>EUT</b>	2.4GHz wireless PCI	<b>Model</b>	F5D7000
<b>Frequency Range</b>	Below 1GHz		
<b>Environmental Conditions</b>	25deg. C , 70%RH	<b>Tested By</b>	Hardaway Lee

SPURIOUS EMISSION LEVEL				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin
72.20	H	-60.5	-57.0	-3.5
72.20	V	-64.4	-57.0	-7.4
78.16	H	-60.9	-57.0	-3.9
78.16	V	-65.6	-57.0	-8.6
479.56	H	-62.2	-57.0	-5.2
479.56	V	-60.0	-57.0	-3.0
883.57	V	-62.8	-57.0	-5.8
997.19	H	-61.7	-57.0	-4.7

**NOTE:** The emission behavior belongs to narrowband spurious emission.

### 3.9.6 TEST RESULTS (A)

<b>EUT</b>	2.4GHz wireless PCI	<b>Model</b>	F5D7000
<b>Channel</b>	1, 7, 10, 13		
<b>Environmental Conditions</b>	25deg. C , 70%RH	<b>Tested By</b>	Hardaway Lee

SPURIOUS EMISSION LEVEL					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin
1	1607.95	H	-74.5	-47.00	-27.50
	1607.96	V	-70.9	-47.00	-23.90
	3215.90	V	-65.6	-47.00	-18.60
	3215.92	H	-58.9	-47.00	-11.90
	4823.70	H	-63.8	-47.00	-16.80
	4824.08	V	-64.3	-47.00	-17.30
	6431.44	V	-60.4	-47.00	-13.40
	6431.79	H	-59.7	-47.00	-12.70
7	1627.97	V	-69.2	-47.00	-22.20
	1628.35	H	-73.0	-47.00	-26.00
	3255.93	H	-66.3	-47.00	-19.30
	3255.95	V	-67.7	-47.00	-20.70
	4884.05	V	-63.7	-47.00	-16.70
	4884.98	H	-63.4	-47.00	-16.40
	6511.67	V	-61.3	-47.00	-14.30
	6513.58	H	-60.3	-47.00	-13.30
10	1637.95	H	-72.6	-47.00	-25.60
	1637.95	V	-69.5	-47.00	-22.50
	3275.93	V	-66.6	-47.00	-19.60
	3276.06	H	-67.6	-47.00	-20.60
	4914.20	H	-65.4	-47.00	-18.40
	4914.22	V	-64.7	-47.00	-17.70
	6551.58	H	-58.8	-47.00	-11.80
	6552.12	V	-60.7	-47.00	-13.70
13	1647.96	V	-71.9	-47.00	-24.90
	1648.11	H	-73.7	-47.00	-26.70
	3295.88	V	-67.7	-47.00	-20.70
	3295.98	H	-67.7	-47.00	-20.70
	4943.75	V	-65.1	-47.00	-18.10
	4943.97	H	-64.2	-47.00	-17.20
	6591.91	V	-61.5	-47.00	-14.50
	6592.05	H	-60.1	-47.00	-13.10

**NOTE:** The emission behavior belongs to narrowband spurious emission.



### 3.9.7 TEST RESULTS (B)

<b>EUT</b>	2.4GHz wireless PCI	<b>Model</b>	F5D7000
<b>Channel</b>	1, 7, 10, 13		
<b>Environmental Conditions</b>	25deg. C , 70%RH	<b>Tested By</b>	Hardaway Lee

SPURIOUS EMISSION LEVEL					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin
1	1607.94	V	-71.4	-47.00	-24.40
	1607.97	H	-73.6	-47.00	-26.60
	3215.51	V	-67.7	-47.00	-20.70
	3215.80	H	-67.5	-47.00	-20.50
	4823.82	H	-64.9	-47.00	-17.90
	4823.92	V	-64.9	-47.00	-17.90
	6431.73	V	-60.6	-47.00	-13.60
	6432.12	H	-60.2	-47.00	-13.20
7	1627.92	H	-73.0	-47.00	-26.00
	1627.94	V	-70.2	-47.00	-23.20
	3255.43	H	-67.7	-47.00	-20.70
	3256.13	V	-68.4	-47.00	-21.40
	4883.76	H	-64.1	-47.00	-17.10
	4883.91	V	-65.0	-47.00	-18.00
	6511.51	V	-62.1	-47.00	-15.10
	6512.02	H	-61.7	-47.00	-14.70
10	1637.61	H	-72.8	-47.00	-25.80
	1637.94	V	-70.3	-47.00	-23.30
	3275.96	V	-68.5	-47.00	-21.50
	3276.31	H	-68.4	-47.00	-21.40
	4913.68	V	-65.2	-47.00	-18.20
	4913.95	H	-64.8	-47.00	-17.80
	6551.38	V	-61.2	-47.00	-14.20
	6551.58	H	-59.8	-47.00	-12.80
13	1647.78	H	-73.0	-47.00	-26.00
	1647.93	V	-70.1	-47.00	-23.10
	3285.48	V	-68.2	-47.00	-21.20
	3286.37	H	-68.0	-47.00	-21.00
	4923.59	V	-65.5	-47.00	-18.50
	4923.65	H	-65.0	-47.00	-18.00
	6561.65	H	-61.3	-47.00	-14.30
	6561.80	V	-61.2	-47.00	-14.20

**NOTE:** The emission behavior belongs to narrowband spurious emission.

### 3.10 RECEIVER SPURIOUS RADIATION (CONDUCTED)

#### 3.10.1 LIMIT OF RECEIVER SPURIOUS RADIATION

Narrowband spurious emission limits for receivers

Frequency Range	Limit
30MHz ~ 1GHz	-57dBm
Above 1GHz ~ 12.75GHz	-47dBm

#### 3.10.2 TEST PROCEDURES

Please refer to item 7 of the standard.

#### 3.10.3 DEVIATION FROM TEST STANDARD

No deviation

#### 3.10.4 TEST SETUP

For the actual test configuration, please refer to the related Item in this test report ( Photographs of the Test Configuration ).

### 3.10.5 TEST RESULTS

<b>EUT</b>	2.4GHz wireless PCI	<b>Model</b>	F5D7000
<b>Frequency Range</b>	Below 1GHz		
<b>Environmental Conditions</b>	25deg. C , 70%RH	<b>Tested By</b>	Hardaway Lee

<b>SPURIOUS EMISSION LEVEL</b>			
<b>Frequency (MHz)</b>	<b>Level (dBm)</b>	<b>Limit (Dbm)</b>	<b>Margin</b>
739.52	-83.5	-57.00	-26.50
780.34	-86.6	-57.00	-29.60
821.16	-85.3	-57.00	-28.30
860.04	-83.0	-57.00	-26.00
900.86	-84.1	-57.00	-27.10
941.68	-82.2	-57.00	-25.20
980.56	-83.4	-57.00	-26.40

**NOTE:** The emission behavior belongs to narrowband spurious emission.




<b>EUT</b>	2.4GHz wireless PCI	<b>Model</b>	F5D7000
<b>Channel</b>	1, 7, 10, 13		
<b>Environmental Conditions</b>	25deg. C , 70%RH	<b>Tested By</b>	Hardaway Lee

<b>SPURIOUS EMISSION LEVEL</b>				
<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Level (dBm)</b>	<b>Limit (dBm)</b>	<b>Margin</b>
1	2396.79	-72.5	-47.00	-25.50
	13230.46	-72.3	-47.00	-25.30
7	2430.86	-72.7	-47.00	-25.70
	6927.86	-73.0	-47.00	-26.00
10	2430.86	-73.3	-47.00	-26.30
	13979.96	-73.3	-47.00	-26.30
13	1647.29	-75.4	-47.00	-28.40
	13332.67	-73.6	-47.00	-26.60

**NOTE:** The emission behavior belongs to narrowband spurious emission.

#### 4. PHOTOGRAPHS OF THE TEST CONFIGURATION

##### Tx and Rx SPURIOUS EMISSION TEST

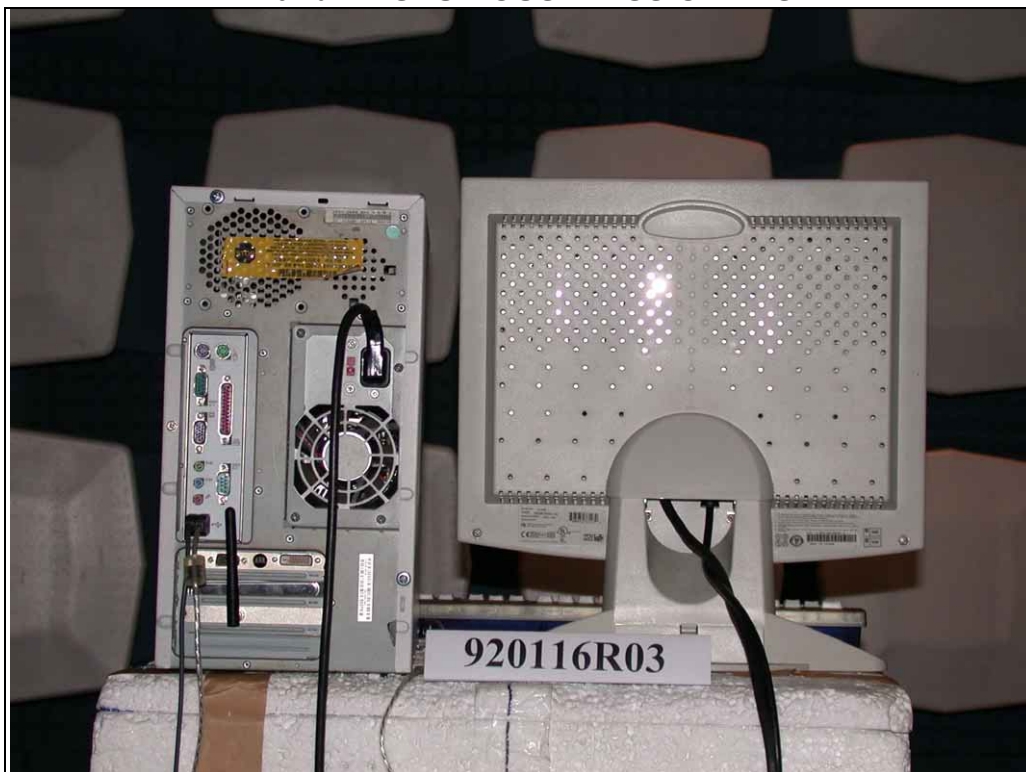



## 5. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

<b>USA</b>	FCC, NVLAP
<b>Germany</b>	TUV Rheinland
<b>Japan</b>	VCCI
<b>New Zealand</b>	MoC
<b>Norway</b>	NEMKO
<b>R.O.C.</b>	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: [www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml). If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC Lab:**  
Tel: 886-2-26052180  
Fax: 886-2-26052943

**Hsin Chu EMC Lab:**  
Tel: 886-35-935343  
Fax: 886-35-935342

**Lin Kou Safety Lab:**  
Tel: 886-2-26093195  
Fax: 886-2-26093184

**Lin Kou RF&Telecom Lab:**  
Tel: 886-3-3270910  
Fax: 886-3-3270892

**Email:** [service@mail.adt.com.tw](mailto:service@mail.adt.com.tw)  
**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.