



Hi-Speed USB 2.0 and FireWire PCI Card


Combine the Power of FireWire technology and USB in one PCI card

This PCI Card gives your computer a bandwidth up to 40 times greater than USB 1.1 with three USB 2.0 ports (2 external, 1 internal) and three FireWire® ports (2 external, 1 internal).

It's the ideal interface for transferring extremely large files from USB 2.0 and FireWire peripherals at ultrafast speeds. Maximising the capabilities of the latest real-time video cameras, scanners, and portable drives, the Hi-Speed USB 2.0 and FireWire® PCI Card gets you the best results from a whole new class of ultrafast devices.



Compare Hi-Speed USB 2.0 to USB 1.1




Benefits:

- 3 FireWire® 400Mbps ports (2 external, 1 internal)
- 3 Hi-Speed USB 2.0 480Mbps ports (2 external, 1 internal)
- Hi-Speed USB 2.0 bandwidth 40 times greater than USB 1.1
- Plug-and-Play Installation
- Compatibility with USB 1.1 and any FireWire peripheral
- Manufacturers Lifetime Warranty

Compliance:

- Hi-Speed USB 2.0
- OHCI
- FCC for home and office
- CE emissions and immunity standards
- C-Tick

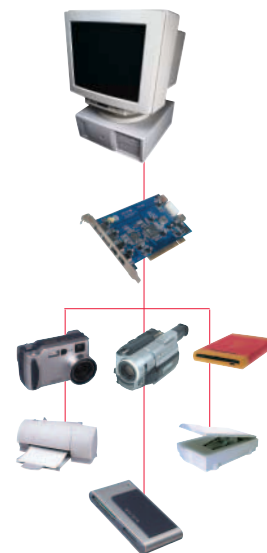

FireNet



Part Number	Description	UPC
F5U508ea	Hi-Speed USB 2.0 and FireWire PCI Card	7-22868-46210-2



USB 2.0

Hi-Speed USB 2.0 and FireWire PCI Card

Product Specifications:

Recommended System Requirements:

266MHz Pentium® II processor
Windows® 98 SE, 2000, Me, or XP
32MB RAM
Available PCI Version 2.1 slot

Ulead® VideoStudio® 5.0 - Recommended System Requirements:

Windows® 98, 98 SE, 2000, Me, or XP
300MHz Pentium® II processor, (500MHz Pentium® III recommended)
64MB RAM (128MB recommended)
300MB of available hard disk space (4GB recommended)
CD or DVD drive
Mouse or other Windows pointing device

Package Includes:

Hi-Speed USB 2.0 and FireWire PCI Card
FireWire Cable (6-Pin to 4-Pin)
Photo Organiser, Video Editing and Network Software
Driver CD
User Manual

Ulead Photo Express My Custom Edition™ - Recommended System Requirements - Ulead Cool 360™

Windows® 95 OSR2, 98, Me, 2000, NT® 4.0 with SP4 or above
Pentium® 166MHz or above processor
32MB RAM, 70MB available hard disk space
Microsoft® Internet Explorer 5 or above
True-colour or high-colour display and monitor
Mouse or pressure-sensitive graphics tablet compatible with WinTab™

Ulead Cool 360™ - Recommended System Requirements:

Windows® 98 or NT 4.0
Pentium® processor
32MB RAM
20MB of available hard disk space
800x600 or higher pixels desktop area
True-colour or high-colour display adapter and monitor
Windows pointing device



Belkin Corporation
+1 310 898 1100
Compton • CA • USA

Belkin Components Ltd.
+44 (0) 1933 35 2000
Rushden • United Kingdom

Belkin Components B.V.
+31 (0) 20 654 7300
Schiphol-Rijk • The Netherlands

Belkin GmbH
+49 (0) 89 143405 0
München • Germany

© 2003 Belkin Corporation. All rights reserved. All trade names are registered trademarks of respective manufacturers listed.