

Guida configurazione sicurezza senza fili

- 1) Per impostare la sicurezza senza fili si deve connettere alla sua rete via cavo. Entrare nella pagina di configurazione del F5D7132 e cliccare sulla voce 'Security'

BELKIN. Wireless Setup Utility

Wireless

- Basic
- Security**
- Specify IP Address
- MAC Address Control
- Wireless Clients

Utilities

- Restart AP
- Restore Factory Default
- Save/Backup Settings
- Restore Previous Settings
- Firmware Update
- System Settings

Status

Version Info		LAN Settings	
Firmware Version	F5D7132v1_UK_5.01.11	LAN/WLAN MAC	00:11:50:B9:17:24
Boot Version	51.0.2.0	IP address	192.168.2.254
Hardware	054054000010	Subnet mask	255.255.255.0

Features	
SSID	belkin54g
Security	WPA-PSK
Repeater	Disabled

- 2) Cliccare su 'Submit' senza inserire nessuna password

BELKIN. Wireless Setup Utility

Wireless

- Basic
- Security
- Specify IP Address
- MAC Address Control
- Wireless Clients

Utilities

- Restart AP
- Restore Factory Default
- Save/Backup Settings
- Restore Previous Settings
- Firmware Update
- System Settings

Login

Before you can change any settings, you need to log in with a password. If you have not yet set a custom password, then leave this field blank and click "Submit."

Password

Default = leave blank

- 3) Dal menu a tendina selezionare 'WPA-Personal (PSK)'

BELKIN. Wireless Setup Utility


Wireless > Security

Security Mode

- Disabled
- WPA-Personal (PSK)**
- 128bit WEP
- 64bit WEP
- WPA2-Personal (AES)

You can configure wireless security. Security should be enabled to assure maximum security. WPA (Wi-Fi Protected Access) provides dynamic key change wireless environments, where WEP (Wired Equivalent Privacy) should be used. More information is available at [http://www.belkin.com](#).

- 4) Nel campo 'Pre-shared Key (PSK)' cambiare la password predefinita con una propria (minimo 8 caratteri) e cliccare su 'Apply Changes'

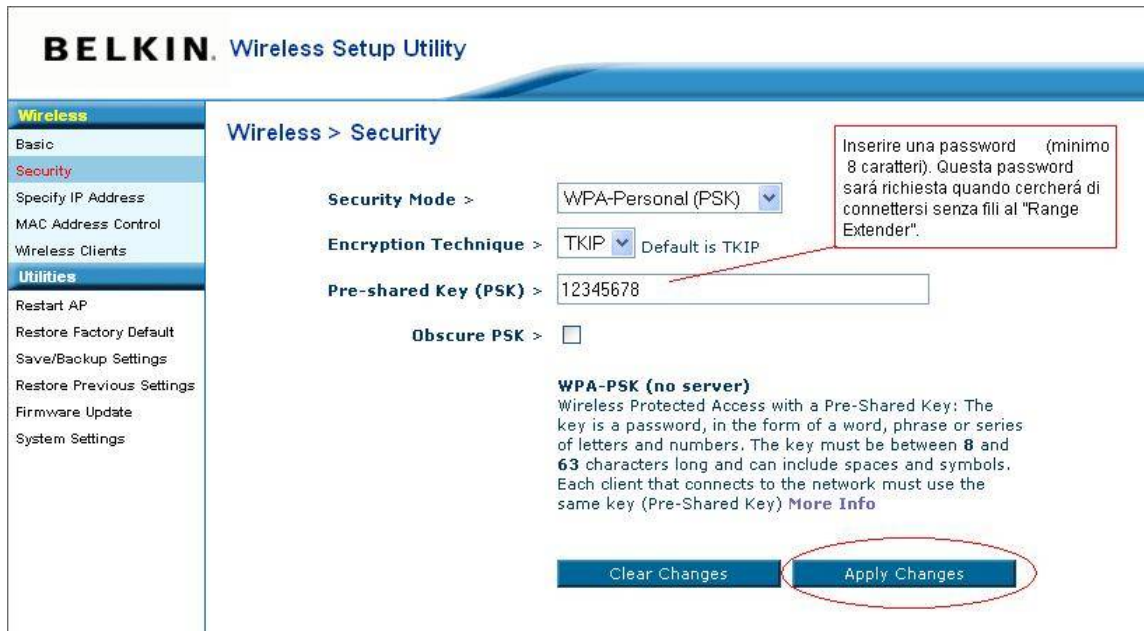

- 5) Una volta salvato le modifiche , resterà sempre nella stessa pagina, cliccare su 'Logout' (in alto a destra)



- 6) Nella pagina 'Status' può controllare se la sicurezza è stata abilitata.

Status

Version Info		LAN Settings	
Firmware Version	F5D7132v1_UK_5.01.11	LAN/WLAN MAC	00:11:50:B9:17:24
Boot Version	51.0.2.0	IP address	192.168.2.254
Hardware	054054000010	Subnet mask	255.255.255.0

Features	
SSID	belkin54g
Security	WPA-PSK
Repeater	Disabled

- 7) Adesso l' Access Point è pronto per essere utilizzato. Quando cercherà di connettersi senza fili gli sarà richiesta la chiave di rete (password impostata nel passaggio 4).